




Industrial PC Labelling Machine

Create durable labels for electrical or datacom installations, via the easy-to-use built-in labelling functions, PC software or from your smartphone or tablet with the Brother cable labelling app.



- Large backlit graphic display
- Advanced cutter (including half cutter) for easy-to-peel labels
- Includes 1 tape cassettes, AC adapter, lithium-ion Battery, USB cable, hand strap and carry case
- Prints 3.5, 6, 9, 12, 18 and 24mm labels and heat shrink tube




Japanese
Excellence
For Over 100 Years



P-touch laminated labels – designed to last

Brother P-touch laminated TZe tapes are available in many different colours and sizes. The thermal transfer ink is sandwiched between two protective layers of PET (polyester film), protecting the text against the effects of liquids, abrasion, temperature, chemicals and sunlight. As the labels have been tested to the extreme, you can be confident of a professional quality label that has been designed to last.

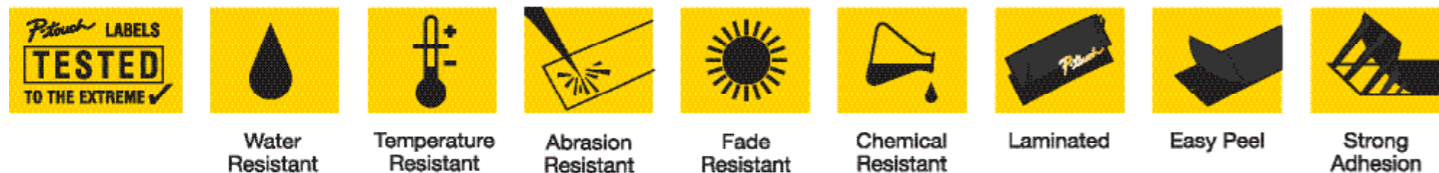

PT-E550WVP

Ensuring cables, conduits, switches and sockets are clearly identified with long lasting, durable labels is essential for electricians, datacom, telecom and security equipment installers.

Prints labels 3.5 to 24mm in width
Print labels in various widths from 3.5mm to 24mm to suit any space.

Large backlit graphic LCD
Easily view symbols and preview your label before printing.

Sequential numbering
Print labels containing a sequence of numbers or letters.

384 built-in symbols
Includes common electrical, datacom, AV, security and safety symbols

Print preview
Easily view symbols and preview your label before printing.

Specialist label functions
Easily create general, faceplate, cable flag/wrap, patch panel and punch down block labels

Database search/merge/print
Upload data from your PC to print labels on-site

USB & Wi-Fi
Print from PC or mobile wirelessly


PT-E550WVP

In addition to the extensive range of TZe tapes in various colours and sizes, specialist tapes for industrial use have been developed for specific labelling tasks including.



Flexible-ID Tape

Use on curved surfaces, sharp bends or cylindrical surfaces.

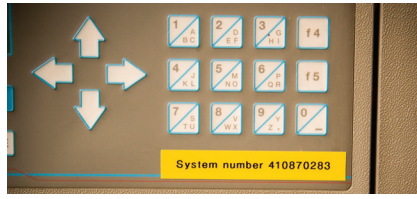

Strong Adhesive Tape

Use on uneven, rough and textured surfaces.



Heat-shrink tube

Shrinks and grips cable when heat is applied.

Technical Specifications

Hardware

Display Type	16 chrs x 3 lines backlit graphic LCD with print preview
Interfaces	USB 2.0, Wi-Fi, Wireless Direct
Print Speed	30mm / second (maximum)
Maximum Tape Width	24mm
Maximum Print Height	18mm
Cutter Type	Automatic (Full & Half)
Battery Type	BA-E001 Li-ion rechargeable battery (supplied) 6 x AA alkaline/rechargeable batteries (LR6/HR6 - not supplied)

Label Creation

Dedicated Labelling Functions	General; Faceplate; Patch panel; Punch block; Cable wrap; Cable flag; Heat shrink tube Serialise (automatic number incrementation)
Fonts	14 fonts; 10 styles; 6-48 point size
Max. Lines per Label	7 (on 24mm width tape cassette)
Max. text blocks	99
Symbols	384
Frames	7
Barcodes	9 protocols
Automatic numbering	1-99
Copy Printing	1-99
Vertical Text Printing	Yes
Rotated text printing	Rotate once; Rotate and repeat

Memory

Maximum Characters per Label	1500
Label Memory Locations	99

PC Software Main Features

Supported Operating Systems	Windows Vista®, Windows® 7, Windows® 8, Mac OS X 10.6 or greater
Cable Labelling Wizard	Yes
Font Faces	All installed true-type fonts
Font Styles	12
Image Import	JPG, BMP, TIFF and other popular types
Screen capture	Yes
Frames	153
Barcodes	21 protocols including 1D/2D barcodes

Included Items

In the Box	PT-E550WVP labelling machine 12mm black on white Flexible ID tape Li-ion rechargeable battery AC adapter Label design software and printer driver CD-ROM USB cable, wrist strap and user guide
------------	--

Supplies

Tape type; Tape widths	TZe tape cassettes; 3.5, 6, 9, 12, 18, 24mm HSe tube cassettes; 5.8, 8.8, 11.7, 17.7, 23.6mm
------------------------	---

Optional Accessories

Batteries	BA-E001 Li-ion rechargeable battery AA alkaline/rechargeable batteries (LR6/HR6)
AC Adapter	AD-E001 AC adapter

Weight and Dimensions

126mm(w) x 250mm(h) x 94mm(d); 1.05kg
--



Contact:

For more information, please contact us at:



www.brother.ae

brother
at your side



Working with you for a better environment
www.brotherearth.com