



# **Professional 3-in-1 Mono Laser Printer**

High-speed, high-quality, network printing and scanning

# DCP-L5510DN



www.brother.ae

# Professional 3-in-1 Mono Laser Printer

Built for business, this 3-in-1 device is designed to deliver professional performance with high-speed, high-quality printing and scanning you can depend on. The DCP-L5510DN also gives you the added flexibility of tailoring the paper input to suit the print needs of your business.

# DCP-L5510DN



# **Key features:**

- Print up to 48 pages per minute
- 2-Sided print, up to 24 sides per minute
- Scanning up to 28 images per minute<sup>3</sup>
- 8.9cm Colour touchscreen
- Gigabit ethernet
- 512MB internal memory
- 250 Sheet paper input tray expandable up to 1,290<sup>11</sup>
- Comes with 6,000 page yield toner, 18,000 maximum yield available<sup>7</sup>
- Compatible with Brother and 3rd Party solutions<sup>19</sup>

# Secure by design

To keep pace with the ever-evolving legislation on privacy and data security, our devices offer the latest industry-standard security features to securely protect your data.

All our products are secure as standard. With businesses shifting towards Zero Trust environments, we know that security is your highest priority. Our security experts continuously research new enhancements to products, solutions and services to proactively ensure all our products are 'secure by design'.

The DCP-L5510DN provides a range of robust features. It uses triple-layer security at a device, network and document level which is verified through external security certification. This offers added peace of mind and guarantees that the integrity of your data is maintained at every step.



The DCP-L5510DN comes with a flexible suite of security features and solutions that can be tailored to your business, enabling you to easily audit, control and manage your fleet of devices securely.



# Your device protects your business by reducing its attack surface through:

**Restricting user access -** by using LDAPS or Windows Active Directory, only authorised users are able to access the device.

**Restricting privileges at a device level -** with Secure Function Lock and Setting Lock, only authorised users are permitted access to specific functions.

**Maintaining device integrity -** with runtime intrusion detection, Secure Boot, digitally signed firmware and end-to-end encrypted connections, devices are always performing at their optimum level of security.

t, interface **Easily manage and configure your security profile -** using

Device Master Settings, BRAdmin Pro 4 and Mass Deployment Tool, your business can apply settings to entire fleets of devices.

**Audit your devices -** using SIEM integration through Syslog, you can gather real time usage information on your devices.





Your network is protected with flexible industry standard features and management tools including:

**Intrusion protection -** with protocol management, interface restrictions and IPV4 filtering, you have the flexibility to adapt device settings to your business.

**Secure connection -** securely connect to enterprise level wired and wireless networks through industry standard IEEE 802.1X.

**Secure encrypted communication -** by using flexible industry standards such as TLS, SSH, IPSEC, HTTPS and SNMP3, your business can tailor the device to its network.



# Your documents are protected through encryption, storage protection and secure print solutions including:

**Encrypted document transfer -** when you send your print data from your computer to the device, IPPS/HTTPS encryption ensures your data is secure and unreadable.

Secure scan data transfer - whether you are scanning to your local network or over the internet via Web Connect or a cloud-based service, your data is protected using TLS, HTTPS, SFTP (SSH).


**Non-persistent internal memory -** all print job data is automatically wiped during a reboot and data is purged, ensuring no information is left on the device. **Secure print release -** using a Brother secure print solution, documents are only released when you are ready to print and collect them.

**3rd party integration -** through Brother Solutions Interface (BSI), our devices can be fully integrated with trusted 3rd party partners such as Kofax and YSoft, which adds an extra layer of security to your business.

# Solutions ready

Automate workflows and improve business processes and security with print management solutions.

We offer a suite of document management, security and workflow solutions which can be added to the DCP-L5510DN to provide additional professional features to further improve your business processes.

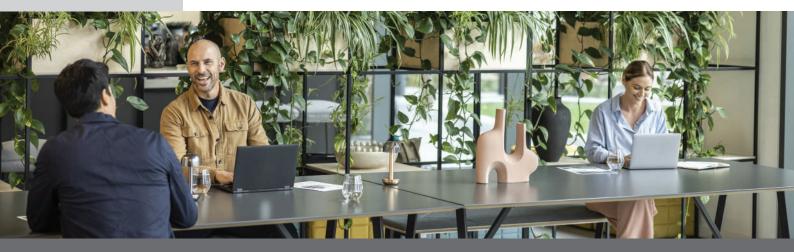

# Seamless integration

Whether you already use print software or would like to understand how specialist print software can help your business, we are here to help.

As a Brother customer, you will have access to a wide choice of leading software vendors including Kofax, YSoft and many more.

We work closely with our software partners across print management and document capture to create tailored solutions for your specific requirements. When we partner with a software vendor, we ensure your DCP-L5510DN works even harder to meet your needs.



General

**Technology** Electrophotographic Laser Processor: 1.2GHz Dual Core

Memory 512MB

**Control panel** 8.9cm Colour Touchscreen LCD Local Interface Hi-Speed USB 2.0, USB 2.0 Host (Front)

Wired Network Gigabit Ethernet

Processor Main: Cortex-A53 1.2GHz Dual Core Sub: ARM946 150MHz

**Resolution** Up to 1200 x 1200dpi

Print Languages PCL6, BR-Script3, IBM Proprinter XL, Epson FX-850, PDF Version 1.7, XPS Version 1.0

**Embedded Fonts (PCL)** 73 scalable fonts, 12 bitmap fonts

# **Carton Contents**

Device, Inbox Toners, Drum, Power Supply Cord, Quick Set-Up Guide

Print

Print Speed (A4) 1-Sided: 48ppm Mono 2-Sided: 24ppm Mono

**FPOT** (First Print Out Time) Up to 6.7 Seconds Mono

**Quiet Mode** A mode to reduce the printing noise

# Embedded Barcodes (PCL)

16 bar codes\* \*Code39, Interleaved 2 of 5, FIM (US-PostNet), Post Net (US-PostNet) EAN-8, EAN-13, UPC-A, UPC-E, Codabar, ISBN (EAN), ISBN (UPC-E), Code128 (set A, set B, set C), EAN128 (set A, set B, set C), Code93, GS1Databar, MSI

Embedded Fonts (Postscript) 66 scalable fonts

# Printer Functions

**N-up Printing** Reduce up to 25 pages into a single page

# Poster Printing

Enlarge a single page into a poster using 2x2, 3x3, 4x4 or 5x5 pages

# **Toner Save Mode**

Use the Toner Save Mode to reduce toner consumption without affecting print speed

## Watermark Printing

Watermark your documents with predefined text, custom logo or custom messages

## **ID** Printing

Add identification to your printed documents (date and time, short custom message or PC username)

## **Booklet Printing**

Print documents in A5 booklet format using automatic or manual 2-sided print

# Print Profiles

Store your favourite driver settings as profiles to easily recall them

# **Direct Print**

Print directly from a USB flash memory drive. Supported formats include; PDF 1.7, JPEG, Exif+JPEG, PRN (created using printer driver of model), TIFF (scanned using brother model), XPS version 1.0

## Manual 2-Sided Print

Manual 2-sided printing (recommended for media not supported by automatic 2-sided print)

# **Reverse Print**

Rotate the content of a printed document by 180°

## Carbon Copy

Prints additional copies of the same document to paper taken from additional paper trays

# **Print Complete Notice**

A printing notification can be set to go to your computer

## **Match Media**

Assign an ID to a specific tray to make the selection of different media types from a specific tray easier

# Skip Tray

Configures your paper tray selection to avoid specific trays/ media for regular printing

## **Job Separation**

Insert a different coloured piece of paper between different print jobs to separate them for easy identification

## **Secure Print**

Protect print jobs with a 4 digit release code required at the device in order for them to be printed Printer Driver

# Windows 11

(32 and 64 bit editions) and more

# macOS

Printing via macOS requires the use of AirPrint. Mac drivers are not provided.

Linux CUPS, LPD/LPRng (i686 and x86 64)

# ChromeOS

Supports native ChromeOS printing **PCL Driver** Generic PCL XL driver

# PostScript Universal Printer Driver

Driver for Windows that enables you to print to any network or locally connected Brother printer

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

# Paper Handling<sup>11</sup>

Paper InputStandard Tray250 Sheets

Multi Purpose Tray 100 Sheets

Automatic Document Feeder (ADF) 50 Sheets

Paper Output 150 Sheets A4

**Envelope Printing** Yes from multi purpose tray

# Media Sizes Standard Tray

A4, Letter, B5(JIS), A5, A5(Long Edge), A6, Executive, Legal, Mexico Legal, India Legal, A4 short (270mm), Folio,16K

Multi Purpose Tray Width 69.8 to 215.9 mm, Length 127 to 355.6 mm Envelope: COM-10, DL, C5, Monarch

#### ADF

Width: 105 to 215.9 mm, Length: 147.3 to 355.6 mm

Scanner Glass Up to A4/Letter

Auto 2-Sided

# Media Type and Weights Standard Tray

Plain Paper, Letterhead, Colored Paper, Thin Paper, Recycled Paper, Thick Paper 60-163gsm

## Multi Purpose Tray

Plain Paper, Letterhead, Colored Paper, Thin Paper, Thick Paper, Thicker Paper, Recycled Paper, Bond, Label, Envelope, Env. Thin, Env.Thick 60-230gsm

#### ADF

Plain and Recycled paper 64-90gsm

## Auto 2-Sided

Plain Paper, Letterhead, Colored Paper, Thin Paper, Recycled Paper 64-105gsm

# Mobile and Web Connectivity

# Brother Mobile Connect<sup>17</sup> (Android)

Print from, scan to, preview copies and check the machine status from an Android device

# Brother Mobile Connect<sup>17</sup> (iPad / iPhone)

Print from, scan to, preview copies and check the machine status from an iPad/iPhone

# Apple AirPrint<sup>17</sup>

Print from and scan to most common file types from any AirPrint enabled application

# Brother Print Service Plugin<sup>17</sup>

Print from an Android devices without a dedicated App.

## Mopria<sup>™ 17</sup>

Print most common file types from Mopria™ supported Android devices

# Brother Apps<sup>18</sup>

Scan to Mobile, Scan to Searchable PDF, Fax forward to Cloud/E-mail, Scan to PowerPoint, Scan to Excel, Scan to Word, Easy scan to E-mail

## Web Connect<sup>18</sup>

Print from and scan to without using a PC on Box, Dropbox, Evernote, OneDrive, Google Drive™ OneNote

Copy Speed (A4) 1-Sided: 48ppm Mono

**Resolution** Up to 1200 x 600dpi FCOT (First Copy Out Time) Up to 8.7 Seconds Mono

**Grey Scale** 256 shades of grey (8 bit for each colour)

# Copy Functions

Multi-Copying/Stack/Sort Makes up to 999 copies of each page/Stacks or Sorts

# Enlargement/Reduction Ratio Reduce or Increase document

sizes from 25% to 400% in 1% increments

# **2 in 1 ID Copying** Allows the user to copy both sides of an ID card to a single A4 sheet

Receipt Copying Produces clearer copies of receipts

# N in 1 Copying

Allows the user to compress 2 or 4 pages on to a single A4 sheet

Scan

**Scanner Type** CIS (Contact Image Sensor)

Colour and Mono Scanning Yes

Scan Speed (A4)<sup>3</sup> 1-Sided: 28ipm Mono and 20ipm Colour Scan Resolution from ADF 600 x 600dpi

Scan Resolution from Scanner Glass 1200 x 1200dpi

Interpolated Scan Resolution Brother Scanner Utility enhances up to 19,200 x 19,200dpi **Colour Depth** 48 bit colour Processing (Input) 24 bit colour Processing (Output)

**Grey Scale** 16 bit colour Processing (Input) 8 bit colour Processing (Output)

# Scanner Functions

#### **Supported File Formats** Including PDF (PDF/A-1b,

Including PDF (PDF/A-1b, Secure PDF, Signed PDF, Searchable<sup>17</sup>) JPEG,TIFF, XPS

**Standard Functions**<sup>17</sup> Scan to USB, E-mail, OCR, Image and File

# **Network Scanning** Scan to network folder (SMB)<sup>16</sup>, FTP. SETP. Email Server.

FTP, SFTP, Email Server, SharePoint (On Premise)

# **Direct Scan**

Scan directly to a USB flash memory storage

# **Scan Features**

Auto Deskew from ADF, Rotate Image<sup>16</sup>, Background Processing<sup>16</sup>, Colour Drop<sup>16</sup>, Character Correction<sup>16,17</sup>, Edge Emphasis<sup>16</sup>, Reduce Noise<sup>16</sup>, Edge Fill<sup>16,17</sup>, Skip Blank Page, Split and Multi page PDF

# Scan To Microsoft Office

Scan to Word (.docx), PowerPoint (.pptx), Excel (.xlsx) for Microsoft Office

# Scan Profile<sup>15</sup>

Create up to 25 preset network, SFTP/FTP profiles for an easy way to store multiple scan settings

# **Document Separation**

Create scanned files based on blank sheet separation or a specific number of single sided images or sheets of paper, even if more documents are set on the ADF Scanner Drivers Windows TWAIN and WIA Windows 10 (32 and 64 bit editions)

# macOS

Scanning via macOS requires the use of AirPrint. Mac drivers are not provided.

Visit support.brother.com for the full list of supported OS and to download the latest drivers and software.

# Linux

SANE (32 and 64 bit editions)

#### ChromeOS

Supports native ChromeOS scanning

# Fleet Management Tools

Unattended Installer<sup>16</sup> Ability to centrally deploy and customise our drivers and software

# MSI Installer<sup>16</sup>

Modular installers that can be distributed through On-premise Active Directory

#### BRAdmin<sup>16,17</sup>

LAN/WAN management software

#### Embedded Web Server

Web based print management software embedded onto the device

#### Driver Deployment Wizard<sup>16,17</sup>

Easily create print drivers for hassle free deployment over your network

#### Mass Deployment Tool<sup>16</sup>

Provides a configuration interface to help manage and deploy device settings

**Status Monitor**<sup>16</sup> Monitor the status of your machine from your computer

# Software

# Brother iPrint&Scan Desktop<sup>15,17</sup>

Print from, scan to, preview copies and check the machine status from Windows or macOS PC

## **PaperPort SE 14**<sup>16,17</sup> Document management and sharing program from KOFAX

#### Utilities

Provides setup guides, manual, FAQ, troubleshooting and contact to Brother customer service

# **Easy Setup**

Simple access to drivers and software for the installation of your Brother machine from support.brother.com

# Connectivity

Wired Network Gigabit Ethernet (10Base-T/100Base-TX/1000Base-T)

#### Mobile

Print or scan from your mobile device with Brother Mobile Connect, Airprint, Mopria

#### Local Interface

Hi-Speed USB 2.0, USB 2.0 Host (Front)

# **Security Features**

# Wired Network Security

SMTP-AUTH, SSL/TLS (IPPS, HTTPS, FTPS, SMTP), SNMP v3 802.1x (EAP-MD5, EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

# Wireless Network Security

WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (TKIP/ AES), WPA3-SAE (AES) \*Wi-Fi Direct supports WPA2-PSK (AES) only. APOP, SMTP-AUTH, SSL/TLS (IPPS, HTTPS, FTPS, SMTP, POP3, IMAP4), SNMP v3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS), Kerberos, IPsec

# IPv4

ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/ Port9100, SMTP Client, IPP/ IPPS, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c/v3, HTTP/HTTPS server, TFTP client and server, ICMP, Web Services (Print/ Scan), SNTP Client, LDAP, Syslog

# IPv6

NDP, RA, DNS resolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port9100, IPP/IPPS, SMTP Client, FTP Client and Server, CIFS Client, TELNET Server, SNMPv1/v2c HTTP/HTTPS server, TFTP client and server, ICMPv6, SNTP Client, LDAP, Web Services (Print/Scan), Syslog

# **IP** Filter

Restrict which network users can or cannot access the device over the network (IPv4 only)

# Secure Print

Protect print jobs with a 4 digit release code required at the device in order for them to be printed

# E-mail Notifications

Automatically have the device send e-mail alerts when it requires attention, such as when the toner is low or needs replacing

# E-mail Reports

Receive usage reports on a regular basis via e-mail

# Automatic Intrusion Detection

All Brother Print devices are secure by design. Devices automatically recognise security attacks and take preventative measures, including rebooting where necessary, to ensure the device remains secure

# **Firmware Updates**

In addition to allowing automatic update alerts to install the latest version the printer can be set to not receive older firmware versions to avoid downgrade by an unauthorised user

# **Cloud Secure Print**

Enables password protected driverless print job release

# Setting Lock

Secures access to the devices control panel by locking it

# **Certificate Management**

Use the default standard self-signed, create a custom self-signed certificate, certificate signing request (CSR), or external public cerificate & private key for protected network communcation

# **Secure Function Lock 3.0**

Use a 4 digit pin or a password to identify and authenticate an individual or groups of users over a network. Allows access control for up to 200 users

# **Digitally-signed Firmware**

The firmware for Brother print and scan devices is digitally signed and secure

# Syslog

Allows IT Admin to access a single application (SIEM tool) to get device status updates for audit purposes over Syslog

# On-Premise Active Directory/LDAP Authentication

Utilise existing infrastructure to restrict access to Brother devices using AD/LDAP. Staff can easily use their existing network login credentials to authenticate

# Port-based Network Access Control

(IEEE 802.1x) Brother devices are in full compliance with this standard, to allow connection to an 802.1x EAP (Extensible Authentication Protocol) protected network

# **Restrict network protocols**

The Protocol Control feature allows an administrator to restrict communication protocols (e.g. FTP, Telnet) as required

## **Store Print Log**

Allows audit of a print log file saved to CIFS server. Record ID, type, name, user, date, time, page count for every print job

# Supplies and Consumables

**Inbox Toner**<sup>7</sup> 1 x 6,000 pages (BK)

TN3607 - 3,000 pages

Standard Yield Toner<sup>7</sup>

Super High Yield Toner<sup>7</sup> TN3607XXL - 11,000 pages

Ultra High Yield Toner<sup>7</sup> TN3617- 18,000 pages Drum Unit DR3607 Approx 75,000 pages at 3 pages per job

Optional Accessories Paper Trays 250 sheet tray LT-5505 520 sheet tray LT-6505

Maximum combinations 2 x LT-5505 or 2 x LT-6505 or 1 x LT-5505 + 1 x LT-6505

# Address Book

# LDAP

The ability to connect to an external LDAP enabled address book, like Microsoft Exchange. Compatible with LDAP and LDAPS

#### Speed Dials<sup>17</sup>

300 locations for E-mail addresses and fax numbers

# Group Dial<sup>17</sup>

A combination of up to 20 groups can be stored for broadcasting

Solutions and Upgrades <sup>19</sup>	<b>Compatible with</b> Order Supplies, Remote Panel, Request Help, SecurePrint+ Barcode Print+, Email Print, Barcode Utility, Custom UI		
3rd Party Compatibility	Brother Solutions Interface (BSI) Create powerful cloud and on premise solutions directly integrating the advanced print, scan and security capabilities of Brother devices.	<b>3rd Party Solutions</b> Compatible through Brother Solutions Interface (BSI) including Kofax ControlSuite, YSoft, FollowMe and more	
Dimensions and Weights	With Carton (WxDxH) 549 x 497 x 580mm - 20.5kg	Without Carton (WxDxH) 417 x 461 x 448mm - 16.90kg	
Duty Cycle	<b>Recommended Monthly</b> Up to 5,000 pages	<b>Maximum Monthly</b> Up to 90,000 pages	
Operating Requirement	<b>Power Requirement</b> 220-240V AC 50/60Hz	<b>Operating Environment</b> Humidity 20 - 80 % 10°C - 32.5°C 50°F - 90.5°F	<b>Storage Environment</b> Humidity 35 - 85 % 0°C - 40°C 32°F - 104°F
Environment	Approx Power Consumption <sup>13,23</sup> Copying is 680W Copying in quiet mode: 430W Printing: 670W Printing in quiet mode: 430W Ready: 31W Sleep: 5.9W Power Off: 0.05W TEC Value 0.63 kWh/week	Sound Power <sup>12</sup> Printing: 7.02B(A) Ready: 4.90B(A) Quiet Mode: 6.54B(A) Deep Sleep: Inaudible Sound Pressure <sup>12</sup> PC Printing (Mono): Approx. 54.0dB(A) Ready: 35.0db(A) Quiet Mode: 50.0db(A) Duiet Mode: 50.0db(A) This reduces the toner consumption to get more pages from your consumables	

- 3 Scan Speeds based on ISO/IEC 17991
- 7 Approx. declared yield value in accordance with ISO/IEC 19752
- 11 Capacity calculated with 80gsm paper
- 12 Sound pressure and sound power level in accordance with ISO 7779
- 13 Power consumption power off is measured according to IEC 62301 Edition 2.0
- 15 Windows and macOS only
- 16 Windows only
- 17 Optional download
- 18 Requires an Internet connection
- 19 Requires additional activation
- 23 Power consumption is measured using ENERGY STAR Ver 3.1 test method network configuration





#### Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

www.brotherearth.com

All specifications correct at the time of printing and are subject to change. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

